


SILICONE GAP FILLER TEL-X-SI

highly thermally conductive elastomer



TEL-X-SI is a non dielectric, thermally conductive silicone foil for an optimised thermal coupling between electronic packages and heat sinks even over large gaps or big tolerances. Through the specific formulation and filling with highly thermally and electrically conductive particles an extraordinary high anisotropic thermal conductivity is reached. Its conformal surface structure and high softness guarantee a very good compliance to the contact surfaces at low pressure. Thus the total thermal resistance is minimised.



Release 02 / 2018

PROPERTIES

- High surface compliance and softness
- Non dielectric
- Thermal conductivity: 20 W/mK (anisotropic)
- Extraordinary chemical resistance and longterm stability
- Shock absorbing

AVAILABILITY

- Sheet 150 x 150 mm
- Double-side self tacky (TEL-XXXX-SI)
- Die cut parts
- Kiss cut parts on sheet
- Optional dielectric with PET film (TEL-XXXX-SI-PET)

APPLICATION EXAMPLES

Thermal link of:

- MOSFETs und IGBTs
- Power diodes or AC/DC converters
- Power modules



For use in Switch mode power supplies / Motor control units / Automotive engine management systems / UPS units / Solar systems

Property	Unit	TEL-X0250-SI	TEL-X0500-SI
Material		Silicone with highly thermally conductive fillers	Silicone with highly thermally conductive fillers
Colour		Dark Grey	Dark Grey
Thickness	mm	0.25	0.50
Hardness	Shore 00	55	55
UL Flammability	UL 94	V0	V0
RoHS Conformity	2011 / 65 / EU	Yes	Yes
Thermal			
Resistance ¹ @ 90 PSI @ Thickness	°C-inch ² /W (mm)	0.05 (0.13)	0.09 (0.30)
Resistance ¹ @ 30 PSI @ Thickness	°C-inch ² /W (mm)	0.06 (0.20)	0.10 (0.41)
Resistance ¹ @ 10 PSI @ Thickness	°C-inch ² /W (mm)	0.08 (0.23)	0.12 (0.47)
Thermal Conductivity	W/mK	20	20
Operating Temperature Range	°C	- 50 to + 180	- 50 to + 180
Electrical			
Volume Resistivity	Ohm - cm	< 100	< 100

Measurement technique according to: ¹ASTM D 5470. All data without warranty and subject to change. Please contact us for further data and information.

Thicknesses: 0.25 mm / 0.5 mm / 0.75 mm

mm vs. N/cm² (PSI) / Rth vs. N/cm² (PSI)

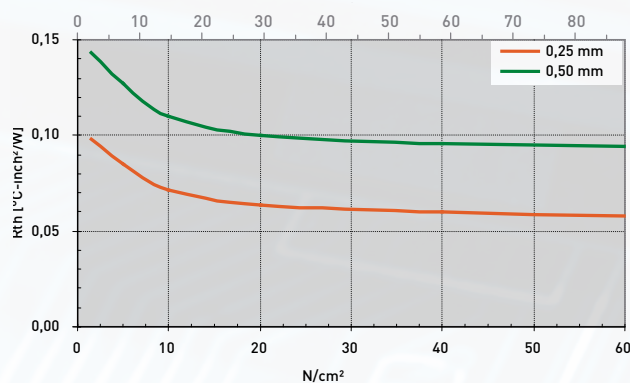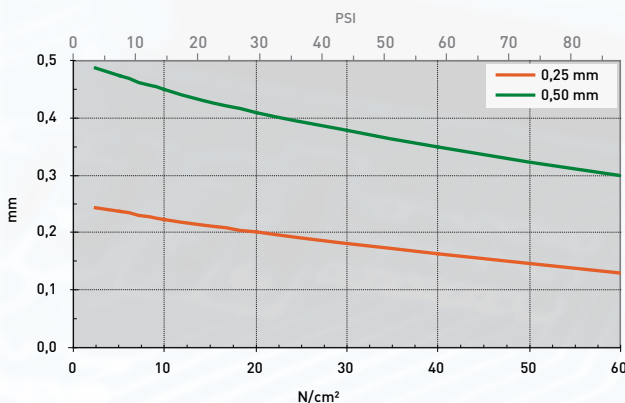

All technical data and information are without warranty and believed to be reliable and accurate corresponding to the latest state of the art. Since the products are not provided to conform with mutually agreed specifications and their use and processing are unknown we cannot guarantee results, freedom from patent infringement, or their suitability for any application. Product testing by the applicant is recommended. We reserve the right of changes.