


# SILICONE FOIL TFO-Z-SI

fibreglass reinforced



TFO-Z-SI is a high performance electrically insulating thermally conductive silicone foil for an optimised thermal coupling between electronic packages and heat sinks. Through the specific formulation and filling with highly thermally conductive ceramic particles an extremely high thermal conductivity is reached. Its conformal surface structure guarantees a very good compliance to the contact surfaces. Thus the total thermal resistance is minimised. The fibreglass reinforcement provides for an outstanding mechanic stability and cutthrough resistance as well as easy handling.



### PROPERTIES

- Thermal conductivity: 8.0 W/mK
- High surface compliance
- Excellent thermal contact
- Outstanding mechanic stability through fibreglass reinforcement
- Extraordinary chemical resistance and longterm stability
- Residue-free removal after use

### AVAILABILITY

- Sheet 420 x 500 mm
- Non tacky (TFO-ZXXX-SI)
- Die cut parts

### APPLICATION EXAMPLES

Thermal link of:


- MOSFETs or IGBTs
- Power diodes or AC/DC converters
- Power modules

For use in Switch mode power supplies / Motor control units / Automotive engine management systems / UPS units / Solar systems

Property	Unit	TFO-Z200-SI	TFO-Z300-SI	TFO-Z450-SI
<b>Material</b>		Ceramic filled silicone	Ceramic filled silicone	Ceramic filled silicone
Colour		Light Grey	Light Grey	Light Grey
Reinforcement		Fibreglass	Fibreglass	Fibreglass
Thickness	mm	0.20	0.30	0.45
Tensile Strength <sup>1</sup>	kpsi	1.9	1.6	1.3
UL Flammability (Equivalent)	UL 94	VO	VO	VO
RoHS Conformity	2011 / 65 / EU	Yes	Yes	Yes
<b>Thermal</b>				
Resistance <sup>2</sup> @ 150 PSI	°C-inch <sup>2</sup> /W	0.09	0.15	0.21
Resistance <sup>2</sup> @ 30 PSI	°C-inch <sup>2</sup> /W	0.30	0.35	0.42
Thermal Conductivity	W/mK	8.0	8.0	8.0
Operating Temperature Range	°C	-40 to +180	-40 to +180	-40 to +180
<b>Electrical</b>				
Breakdown Voltage <sup>3</sup>	kV AC	3.2	5.0	> 6.0

Measurement technique according to: <sup>1</sup> ASTM D 412, <sup>2</sup> ASTM D 5470, <sup>3</sup> ASTM D 149. All data without warranty and subject to change. Please contact us for further data and information.

Thicknesses: 0.20 mm / 0.30 mm / 0.45 mm

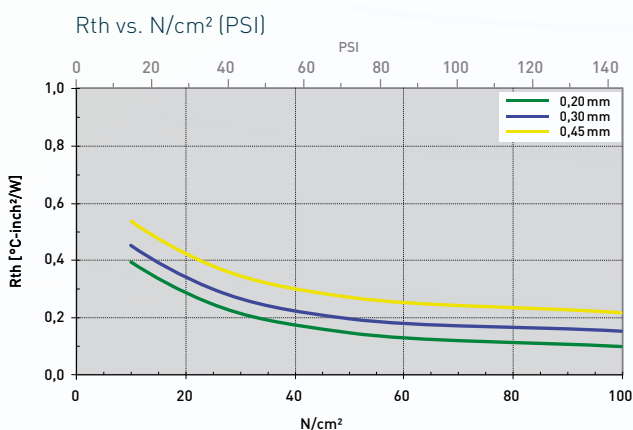

All technical data and information are without warranty and believed to be reliable and accurate, corresponding to the latest state of the art. Since the products are not provided to perform with mutually agreed specifications and their use and processing are unknown we cannot guarantee results, freedom from patent infringement, or their suitability for any application. Product testing by the applicant is recommended. We reserve the right of changes.