


# SILICONE GAP FILLER TGF-SSS-SI

very soft, flexible

TGF-SSS-SI is an electrically insulating thermally conductive high performance silicone gap filler. It is ideal for use in applications where thermal transfer over large gaps caused e.g. by big tolerances or different stack up heights must be achieved. Due to the specific formulation and filling with ceramic particles the silicone elastomer has a very high thermal conductivity. Through its extraordinary softness and flexibility the material perfectly mates to irregular surfaces thus filling gaps at very low pressure. By its use the total thermal resistance is minimised. The natural tackiness of the material allows for an easy and reliable pre-assembly. The material is one-side tacky through lamination with a thermally conductive film.



Release 1 / 2017

### PROPERTIES

- Extraordinary soft and compliant
- Thermal conductivity: 3.0 W/mK
- Operates at very low pressure
- Extraordinary chemical resistance and long-term stability
- Shock absorbing
- Easy mounting through self tackiness
- One-side self-tacky

### AVAILABILITY

- Sheet 210 x 420 mm (0.5 – 2.5 mm)
- Sheet 200 x 340 mm (3.5 – 5 mm)
- Tacky on one side by film laminate (TGF-SSSXXX-SI-A1)
- Die cut parts
- Kiss cut parts on sheet

### APPLICATION EXAMPLES



- Thermal link of:
- SMD packages
  - Through-hole vias
  - RDRAMs memory modules
  - Flip Chips, DSPs, BGAs, PPGAs
- For use in Automotive applications / Laptops / Medicine engineering / Embedded boards

Property	Unit	TGF-SSS1000-SI-A1	TGF-SSS2000-SI-A1	TGF-SSS3000-SI-A1
<b>Material</b>		Ceramic filled silicone	Ceramic filled silicone	Ceramic filled silicone
Colour		Beige / Pink	Beige / Pink	Beige / Pink
Thickness	mm	1.0	2.0	3.0
Hardness	Shore 00	30	30	30
UL Flammability	UL 94	V1	V1	V1
RoHS Conformity	2011 / 65 / EU	Yes	Yes	Yes
<b>Thermal</b>				
Resistance <sup>1</sup> @ 60 PSI @ Thickness	°C-inch <sup>2</sup> /W (mm)	0.64 [0.83]	0.96 [1.26]	1.32 [1.78]
Resistance <sup>1</sup> @ 30 PSI @ Thickness	°C-inch <sup>2</sup> /W (mm)	0.70 [0.89]	1.06 [1.48]	1.51 [2.27]
Resistance <sup>1</sup> @ 10 PSI @ Thickness	°C-inch <sup>2</sup> /W (mm)	0.80 [0.95]	1.26 [1.74]	1.83 [2.67]
Thermal Conductivity	W/mK	3.0	3.0	3.0
Operating Temperature Range	°C	- 40 to + 200	- 40 to + 200	- 40 to + 200
<b>Electrical</b>				
Dielectric Strength	kV / mm	>10	>10	>10
Volume Resistivity	Ohm - cm	1.0 x 10 <sup>10</sup>	1.0 x 10 <sup>10</sup>	1.0 x 10 <sup>10</sup>

Measurement technique according to: <sup>1</sup>ASTM D 5470. All data without warranty and subject to change. Please contact us for further data and information.

Thicknesses: 0.5 mm / 1.0 mm / 2.0 mm / 3.0 mm / 4.0 mm / 5.0 mm

mm vs. N/cm<sup>2</sup> (PSI) / Rth vs. N/cm<sup>2</sup> (PSI)

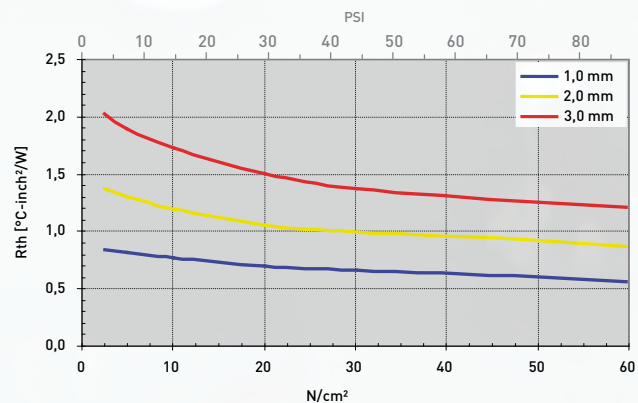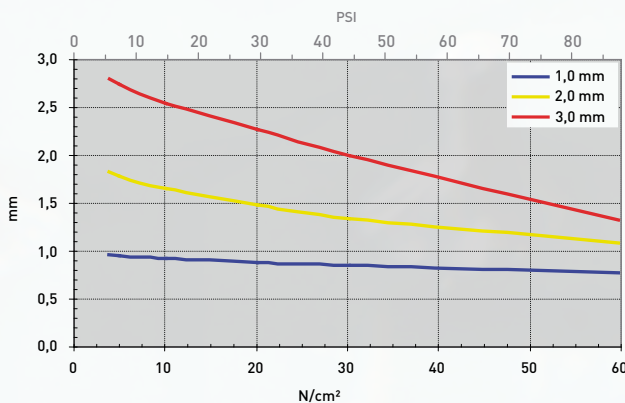

All technical data and information are without warranty and believed to be reliable and accurate. Since the products are not provided to conform with mutually agreed specifications and their use and processing are unknown we cannot guarantee results, freedom from patent infringement, or their suitability for any application. Product testing by the applicant is recommended. We reserve the right of changes.