


# SILICONE GAP FILLER TGF-YP-SI

plastic

TGF-YP-SI is an electrically insulating thermally conductive very high performance silicone gap filler. It is ideal for use in applications where a very good thermal transfer over large gaps caused e.g. by big tolerances or different stack up heights must be achieved. Due to the specific formulation and filling with ceramic particles the silicone elastomer has an outstandingly high thermal conductivity. Through its softness and plasticity the material perfectly mates to irregular surfaces thus filling gaps at low pressure. By its use the total thermal resistance is minimised. The natural tackiness of the material allows for an easy and reliable pre-assembly.



Release 02 / 2021

### PROPERTIES

- Plastic
- Soft and compliant
- Thermal conductivity: 7.0 W/mK
- Extraordinary chemical resistance and longterm stability
- Two-side self-tacky

### AVAILABILITY

- Sheet 460 x 100 mm
- Tacky on both sides (TGF-YPXXX-SI)
- Die cut parts
- Kiss cut parts on sheet

### APPLICATION EXAMPLES

- Thermal link of:
- SMD packages
  - Through-hole vias
  - Capacitors
  - Electronic parts to heat pipes
- For use in Automotive applications / Laptops / Medicine engineering / Industrial PCs



Technical Data Sheet

PROPERTY	UNIT	TGF-YP1000-SI	TGF-YP2000-SI
<b>MATERIAL</b>			
		Ceramic filled silicone	Ceramic filled silicone
Colour		Grey	Grey
Thickness	mm	1.0 ±0.10	2.0 ±0.20
Hardness	Shore 00	55	55
UL Flammability (Equivalent)	UL 94	V0	V0
RoHS Conformity	2015 / 863 / EU	Yes	Yes
<b>THERMAL</b>			
Resistance <sup>1</sup> @ 60 PSI @ Thickness	°C-inch <sup>2</sup> /W (mm)	0.20 (0.75)	0.45 (1.50)
Resistance <sup>1</sup> @ 30 PSI @ Thickness	°C-inch <sup>2</sup> /W (mm)	0.27 (0.90)	0.59 (1.75)
Resistance <sup>1</sup> @ 10 PSI @ Thickness	°C-inch <sup>2</sup> /W (mm)	0.32 (0.95)	0.67 (1.90)
Thermal Conductivity	W/mK	7.0	7.0
Operating Temperature Range	°C	- 40 to + 150	- 40 to + 150
<b>ELECTRICALLY</b>			
Dielectric Strength	kV / mm	>10	>10
Volume Resistivity	Ohm - cm	> 1.0 x 10 <sup>12</sup>	> 1.0 x 10 <sup>12</sup>
Dielectric Constant	@ 1 MHz	7	7

Measurement technique according to: 'ASTM D 5470. All data without warranty and subject to change. Please contact us for further data and information.

Thicknesses: 1.0 mm / 2.0 mm / 3.0 mm

mm vs. N/cm<sup>2</sup> (PSI) / Rth vs. N/cm<sup>2</sup> (PSI)

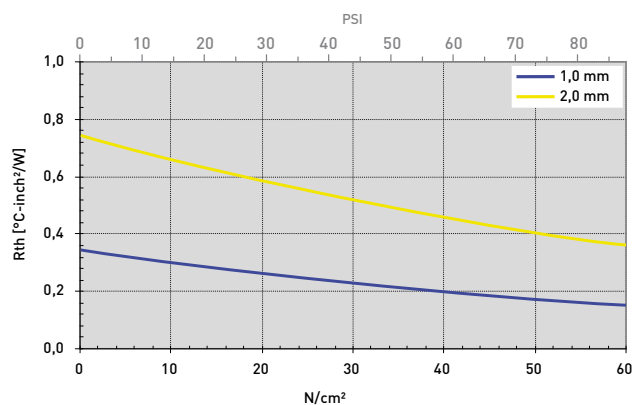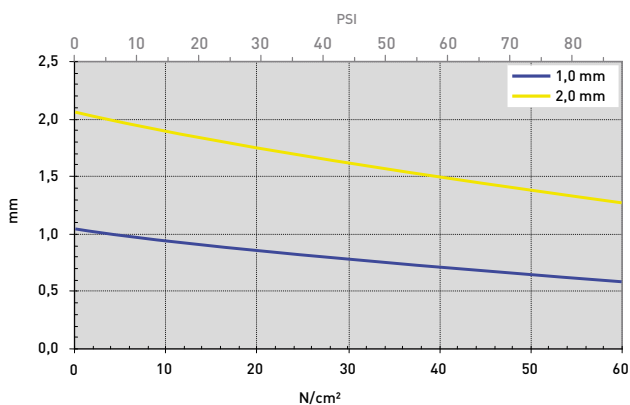

All technical data and information are without warranty and believed to be reliable and accurate corresponding to the latest state of the art. Since the products are not provided to conform with mutually agreed specifications and their use and processing are unknown we cannot guarantee results, freedom from patent infringement, or their suitability for any application. Product testing by the applicant is recommended. We reserve the right of changes.