


**DISPENSABLE TWO PART GAP FILLERS**



- Ultra-Conforming at almost ZERO Pressure
- Maximum Tolerance Compensation – from almost ZERO to some mm
- Excellent Thermal, Mechanical and Chemical Stability
- Minimized Siloxane Volatility for Silicone Sensitive Applications

**OUR PRODUCTS:**  
 TDG-L-SI-2C-Y with 2.0 W/mK  
 TDG-T-SI-2C with 3.0 W/mK  
 TDG-U-SI-2C with 3.6 W/mK  
 TDG-W-SI-2C with 4.5 W/mK

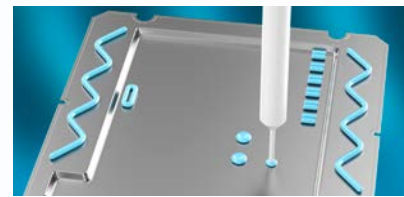

**STRIVING FOR OPTIMIZED THERMAL SYSTEMS**

Innovative heat pipe solutions for heat transfer and heat spreading to meet a wide range of application challenges in Electric and Hybrid Vehicles.

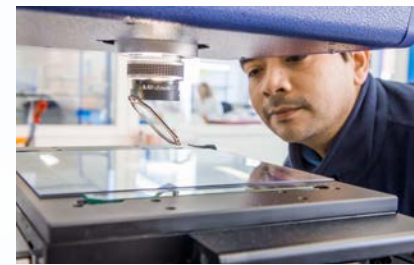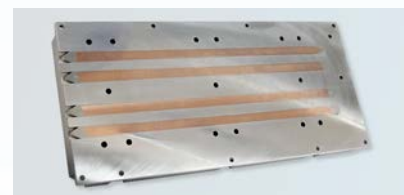


**HALA CONTEC GMBH & CO. KG**

Hans-Böckler-Straße 15  
 D-73230 Kirchheim unter Teck  
 Phone +49 7021 73141-0  
 Fax +49 7021 73141-99

Siemensstraße 5  
 D-85521 Ottobrunn  
 Phone +49 89 665 477-83  
 Fax +49 89 665 477-85

contec@hala-tec.de  
 www.hala-tec.de

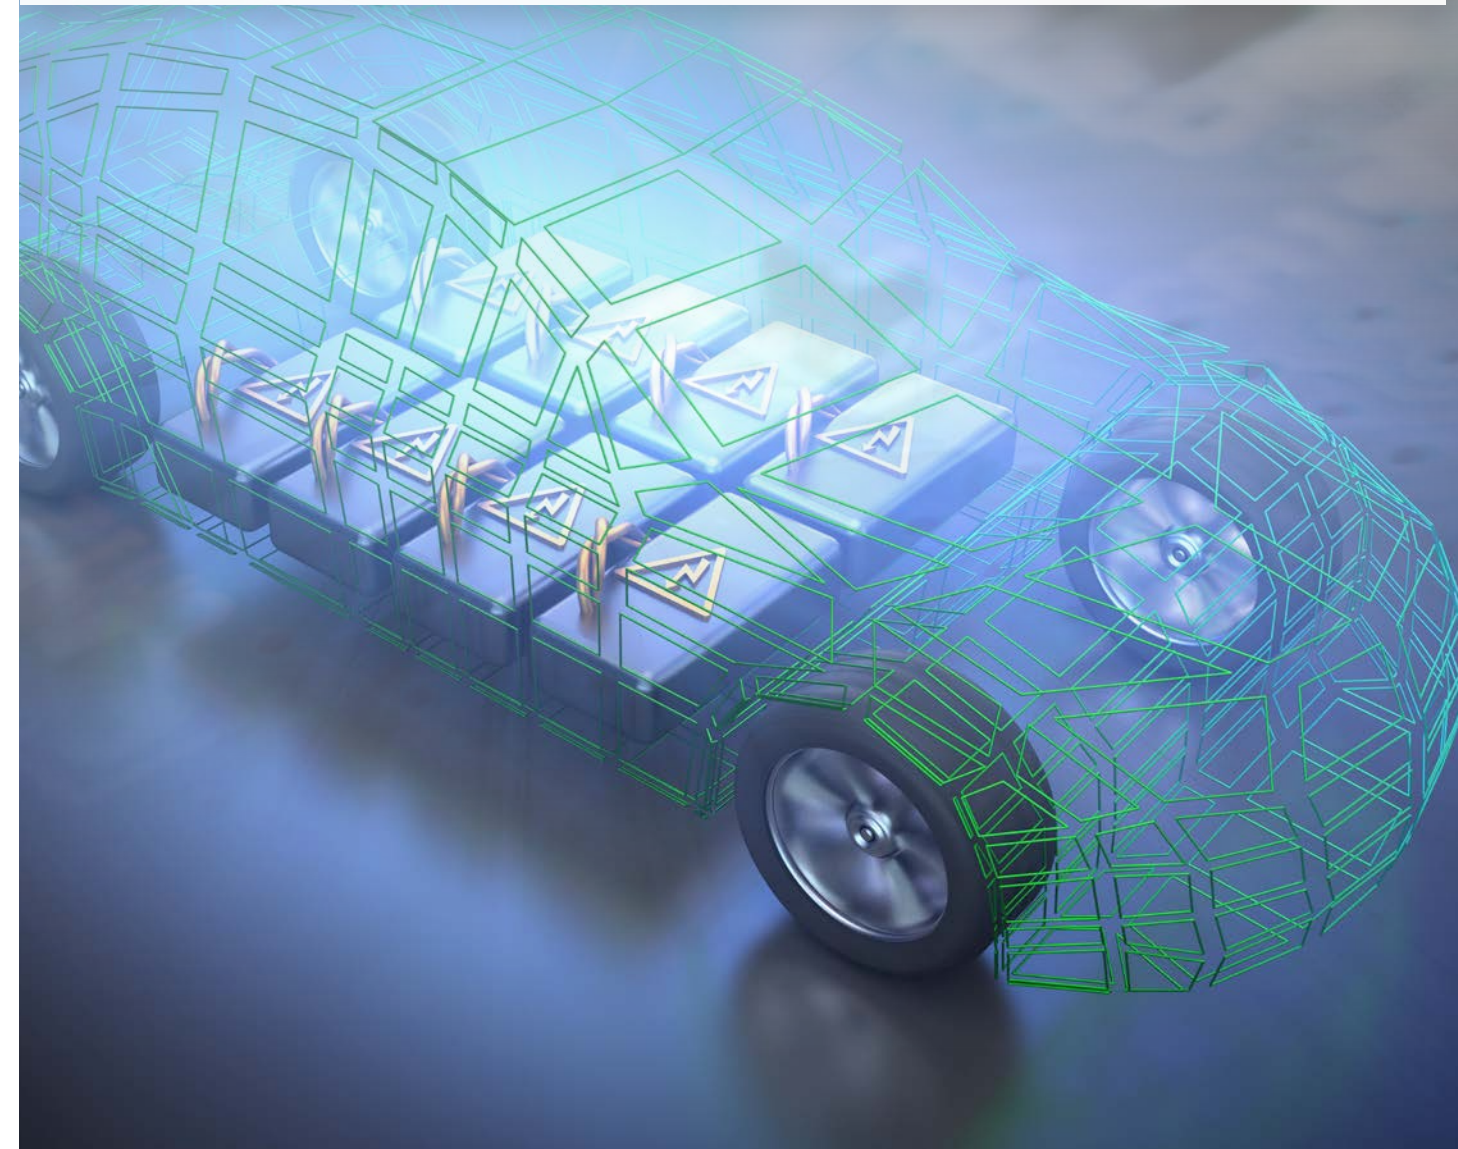

**ADVANCED THERMAL INTERFACE MATERIALS AND SOLUTIONS**

FOR E-MOBILITY




SOLUTIONS FOR E-MOBILITY

- Excellent Thermal Performance
- Silicone or silicone-free
- High Reliability under Harsh Conditions
- Lasting Mechanic, Thermal, Chemical Stability
- Stringent Cost-Efficiency
- Automated Assembly and Dispense
- Extending Life Time
- Reducing Power Consumption

EXTENDED RANGE OF THERMALLY CONDUCTIVE INTERFACE MATERIALS


- Gap filler pads – silicone or silicone-free
- Dispensable 2 part gap fillers
- Silicone caps
- PSA tapes
- Foils and highly dielectric films
- 1 part silicone adhesives
- 2 part silicone or PU encapsulants
- Phase change films and compounds

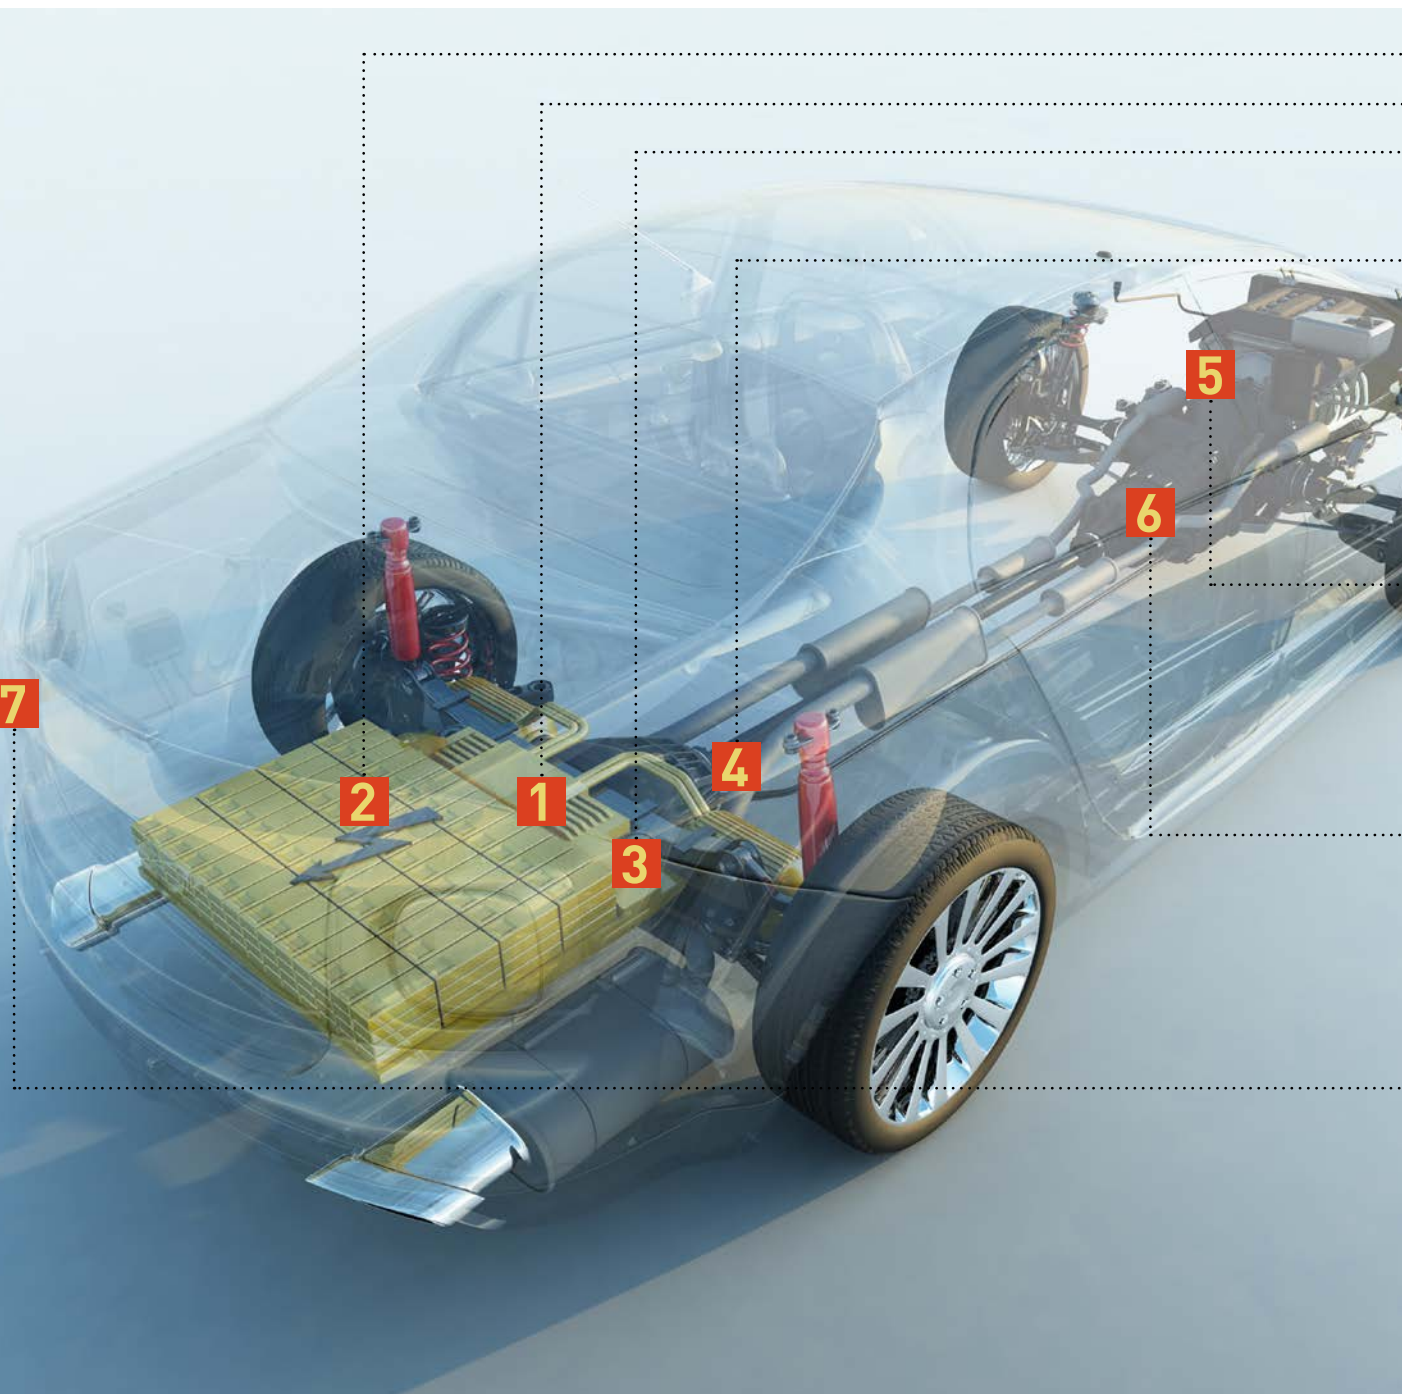

Battery Charger



Battery Packs

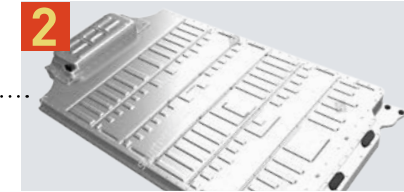

Battery Management Systems (BMS)



Power Converter / Inverter



Motor / Generator



PTC Heater



LED Systems



TYPE	PRODUCT	DATA						Where to be used in an Electric or Hybrid Vehicle						
		Color	Thermal Conductivity [W/mK]	Thermal Resistance @ 0.2 mm 150 PSI [°C-inch²/W]	Dielectric Breakdown @ 0.2 mm [kV (AC)]	Glass Fibre Mesh Reinforcement	Optional 1-side Adhesive	1 Battery Charger	2 Battery Packs	3 Battery Management Systems (BMS)	4 Power Converter / Inverter	5 Motor / Generator	6 PTC Heater	7 LED Systems
Silicone Foils	TF0-X-SI	White	5.0	0.11	3.0	X	X	XX		XX		XX	XX	
	TF0-K-SI	Grey	2.5	0.24	2.0	X	X	XX		XX		X	X	
	TF0-Q-SI	Pink	4.0	0.20	4.8	X	X	XX		XX		XX	X	
	TF0-O-SI	Grey	3.0	0.22	5.0	X	X	XX		XX		XX	X	
	TF0-J-SI	Brown	2.0	0.31	5.0	X	X	XX		XX		X	X	
Silicone Caps	TCP-J-SI	Pink	1.5	0.68	10			X						
Silicone Gap Filler Pads	TGF-XS-SI	Grey	6.0	60	8			XX	X	XX				
	TGF-WSS-SI	Grey	5.5	55	10		X	XX	X	XX				
	TGF-USS-SI	Grey / Grey	3.3	45	10			XX	X	X				
	TGF-TSS-SI	Purple	3.2	37	15			XX	X	X				
	TGF-RSS-SI	Light blue	3.0	43	>7		X	XX	X	X				
	TGF-LSS-SI	Light beige	2.5	34	>7		X	XX	X	X			X	
	TGF-M-SI	Blue	2.5	50	10			X		XX				
	TGF-JXS-SI-A1	Blue / Grey	2.0	20	10			X	XX	X				
	TGF-EXS-SI-GF	Brown / Grey	1.4	10	20		X		XX					
	Silicone-free Gap Filler Pads	TGF-R-NS	Light Grey	3.0	75	7.8			X		X			X
	TGF-W-NS	Pink	6.0	70	7.8			XX		XX			X	
	TGF-NS-NS	Brown	2.5	47	1.9			X	X	X			X	
Dispensable 2 Part Silicone Gap Fillers	TDG-W-SI-2C	Pink / White	4.5	60	10			X		X				
	TDG-U-SI-2C	Blue / White	3.6	38	10			X	X	X				
	TDG-T-SI-2C	Blue / White	3.0	55	10			XX	XX	XX				
	TDG-L-SI-2C-Y	Yellow / White	2.0	52	10			XX	XX	XX		XX		
PSA Tapes	TAT-J-PE	White	0.7	0.50	8.9		6.1	0.20					XX	
		Color	Thermal Conductivity [W/mK]	Thermal Resistance [°C-inch²/W]	Dielectric Breakdown [kV (AC)]	Peel Off @ Al [N/cm]	Thickness [mm]							
1 Part Silicone Adhesives	TAD-P-SI-1C	Grey	2.30	67	Condensational	2.11	350		X		X	X	XX	
	TAD-O-SI-1C	Grey	2.10	56	Additional	2.18	140		XX		XX	XX		
	TAD-G-SI-1C	Grey	1.38	67	Additional	2.06	43		XX		XX	XX		
2 Part Silicone Encapsulant	TCR-H-SI-2C	Light grey / Orange	1.2	40 [Shore A]	Additional	2.2	1.95					X		
	TCR-D-SI-2C	Beige / Black	0.68	32 [Shore A]	Additional	1.60	4.5					XX		
	TCR-J-PU-2C-LV-AR	Blue / Brown	1.5	45 [Shore D]	Additional	2.3	4		X	XX	X	X		
	TCR-L-PU-2C-LV-AR	Blue / Brown	2.1	55 [Shore D]	Additional	2.4	12		XX	XX	XX	X		
2 Part PU Encapsulant	TCR-R-PU-2C-LV-AR	Blue / Brown	3.0	50 [Shore D]	Additional	2.3	35		XX	X	XX	X	X	
		Color	Thermal Conductivity [W/mK]	Thermal Resistance @ 150 PSI [°C-inch²/W]	Phase Change Temperature	Carrier	Thickness [mm]							
Phase Change Film	TPC-W-PC	Grey	3.5	0.01	45		0.1, 0.2, 0.3		X		X	XX		
	TPC-T-AL-CB	Black		0.01	50		Aluminum	0.076, 0.102	XX		X	XX	XX	
Heat Pipe Assembly		Function	Thermal Conductivity [W/mK]	Heat Pipe Material	Temperature Range	Filler	Assembly							
		Heat Transfer Heat Spreading	> 5000 W/mK	Copper	0 to 200 °C	Deionised water	Aluminum / Copper		XX		XX	XX	X	XX